


FEATURES

- ◆ 70 or 25 volt
- ◆ ET10 commercial quality
- ◆ ET10T and ET20/70 are premium quality
- ◆ Low insertion loss
- ◆ Wire or screw termination

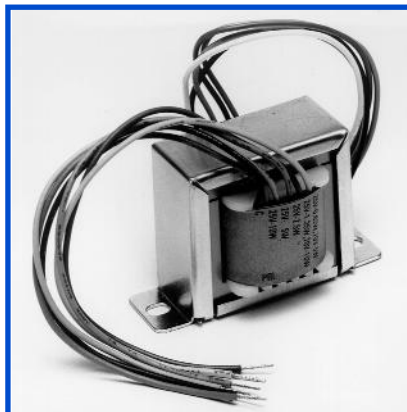

DESCRIPTION

The ET10 transformer is a commercial quality 70 or 25 volt transformer that can be used with 8 ohm loads to 10 watts RMS. Being dual voltage, it can handle a wide range of applications. The ET10 use leads for termination to both speaker and amplifier output.

The ET10T is premium 70 or 25 volt matching transformer. The ET20/70 is a premium quality 70 volt transformer that can be used with 8/4 ohm loads to 20 watts RMS. Low insertion loss, extended frequency response and screw terminals make both the ET10T and ET20/780 superior transformers.

SPECIFICATIONS

Model Number	ET10	ET10T	ET20/70
Watts/RMS	10	10	20
Primary Voltage	70/25V	70/25V	70V
Primary Taps in Watts - 70V	.31, .62, 1.25, 2.5, 5, 10	.25, .5, 1, 2, 4, 8, 10	2.5, 5, 10, 15, 20
- 25V	.31, .62, 2.5, 5, 10	.125, .25, .5, 1	N/A
Secondary Impedance	8 Ohms	8 Ohms	8/4 Ohms
Insertion Loss	1.3dB	1.00dB	< 1dB
Frequency Response	60 to 15kHz	60 to 20kHz	40Hz to 20kHz
Mounting Holes	2 3/8"	2 3/8"	2 3/8"