

FEATURES

- ◆ Weather Resistant
- ◆ All Metal Construction
- ◆ Built-in Line Transformer

APPLICATIONS

- ◆ Paging background music systems
- ◆ Patio
- ◆ Retail space
- ◆ Outdoor areas
- ◆ Schools



DESCRIPTION

The H2 is a full weather resistant 4" two-way speaker system with built in 25/70 volt line transformer and complete with a two piece mounting bracket. Quality built from aluminum and having exposed screws made from stainless steel, this little tank packs a powerful punch.

SPECIFICATIONS


| | |
|-----------------------------------|--|
| Driver Size | 4" woofer, 1/2" tweeter |
| Power Handling | 30 watts |
| Frequency Response | ±6dB 80 Hz - 20 kHz |
| Sensitivity | 90db, 1 watt, 1 meter |
| Impedance | 8 Ω / 25 / 70 volt |
| Tap Settings | 8 Ω direct 5w 10w 15w 20w 30w @ 70 volt / 25 volts |
| Cone & Surround Material | Paper treated |
| Voice Coil Material | Copper EISVW wiring |
| Voice Coil Insulation Material | Polyamide, 190 Degree |
| Voice Coil Former Material | Kapton former |
| Bezel, Baffle & Back Can Material | Aluminum |
| Connector Type | Wire leads |
| Net Weight | 2.2 Kg |

HUMMER SERIES

H2 - SPEAKER



DIMENSIONS

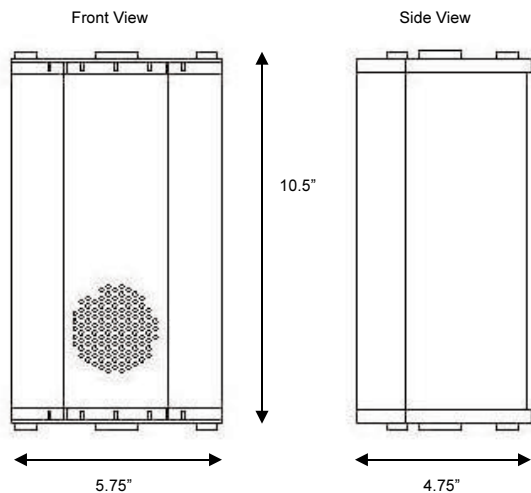

FREQUENCY RESPONSE

| Frequency | Deg | Q | DIdB |
|-----------|------|------|------|
| 250 Hz | 360° | 1.3 | 0.7 |
| 500 Hz | 360° | 1.6 | 1.2 |
| 1 kHz | 100° | 2.1 | 3.7 |
| 2 kHz | 110° | 3.2 | 5.6 |
| 3 kHz | 52° | 8.3 | 8.0 |
| 4 kHz | 45° | 9.8 | 8.8 |
| 8 kHz | 36° | 10.5 | 9.5 |
| 16 kHz | 32° | 11.2 | 10.4 |