

FEATURES

- ◆ 10 oz. magnet
- ◆ 4 holes for standard baffle mounting
- ◆ Pre-punched holes for mounting transformers
- ◆ Treated paper cone

APPLICATIONS


- ◆ Office Buildings
- ◆ Hotel Lobbies
- ◆ Retail Buildings
- ◆ Schools




DESCRIPTION

Enforcer's E410CW is a low distortion 4 inch loudspeaker. Its remarkably wide bandwidth make it an excellent choice for space limited areas. May be used for foreground, background or sound masking applications. May be assembled with choice of 5, 10 or 20 watt transformers (ET5S, ET10, ET10T, ET20/70). Available with round or square baffles (ECB4R, ECB4S). For improved sound quality add flush mount box EBB4RF/SF or surface mount EBB4SS backbox.

SPECIFICATIONS

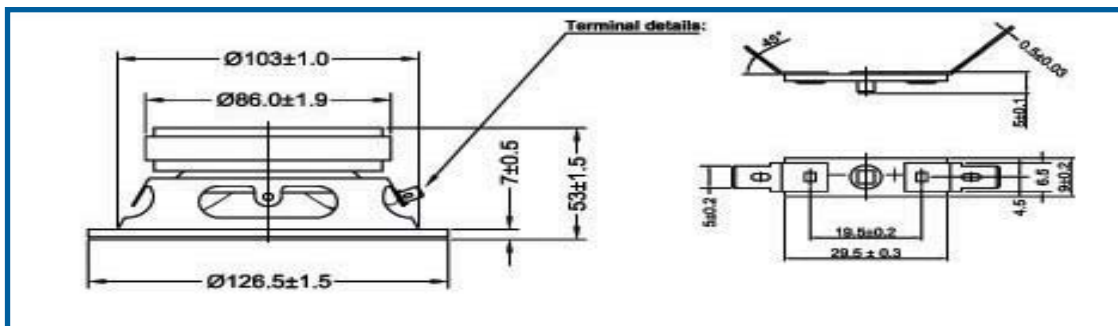

SPL vs Freq

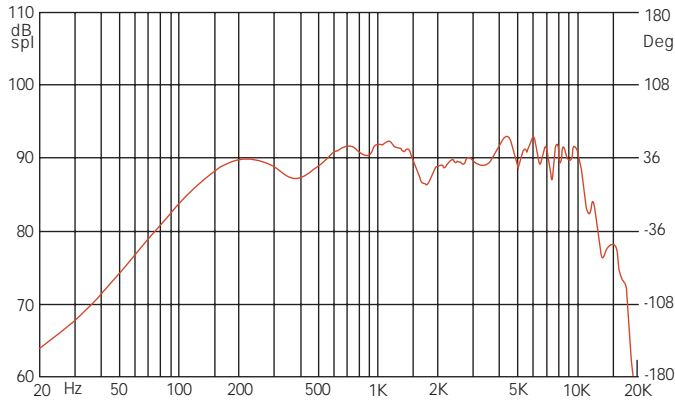

Freq.	Deg.	Q	D1dB
250 Hz	165°	2.43	3.85dB
500 Hz	180°	2.45	3.89dB
1 kHz	128°	3.75	5.74dB
2 kHz	115°	3.44	5.37dB
4 kHz	61°	6.96	8.43dB
8 kHz	50°	5.59	7.47dB
16 kHz	23°	11.46	10.59dB

Construction	
Depth	2 1/8"
Diameter	4"
Mounting	4 Hole Standard Baffle
Voice Coil Material	Aluminum
Voice Coil Insulation	Polyamide, 220 Degree Rating
Voice Coil Former	Aluminum
Speaker Frame	22 ga Stamped Steel
Frame Paint	Black Zinc
Net Weight	1.72 lbs.
Shipping Weight	2.00 lbs.

IMPEDANCE CURVE

